

Rough Terrain Scissor Lifts
1018RE(3369RE)
 Compliance with CE, CU-TR standards

Product Highlights

Excellent performance

- Up to 35% gradeability, easily handling outdoor needs
- Stable movement, copes well with potholed ground


High efficiency

- 1.6m(5'3") wide platform with one-way extension platform
- One-click leveling, easy work on uneven road surfaces

Easy maintenance

- Two-sided hatchback door design, for convenient maintenance
- Swing-out engine compartment for easy maintenance

Standard features	
■ 4-wheel drive and 2-wheel steering	■ DTC system
■ Floating device	■ Outriggers
■ Solid tyres	■ Overload sensing system
■ Kubota engine	
Optional features	
■ Without outriggers	■ Foam-filled tyres
■ AC power cable to platform	■ Overhead anti-collision device
■ Headlight	■ Hydraulic generator(3.5kW)

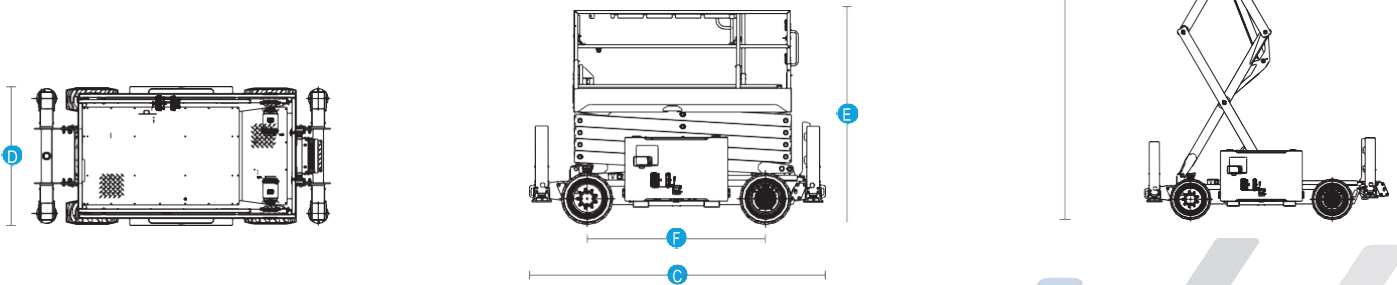

SINOBOOM

Sinoboom Intelligent Equipment Co Ltd

📍 No.128 East Jinzhou Av., Ningxiang Hi-Tech Industry Park, Changsha, Hunan, China, 410600

🌐 www.sinoboom.com

✉ sales@sinoboom.com

Rough Terrain Scissor Lifts
1018RE(3369RE)
 Compliance with CE, CU-TR standards

SINOBOOM

Model		1018RE(3369RE)
Dimensions		
Max Working Height		12m(39'4")
A Max Platform Height		10m(32'10")
B Max Horizontal Extension		1.5m(1.5'11")
C Length-Stowed (Outriggers/Without Outriggers)		3.8m/3.19m(12'6"/10'6")
D Width - Stowed		1.77m(5'10")
Height-stowed	Rail Folded	1.96m(6'5")
	E Rail Unfolded	2.59m(8'6")
F Wheelbase		2.28m(7'6")
Ground Clearance		0.22m(9")
Platform Dimensions(L×W×H)		2.8m×1.6m×1.1m(9'2"×5'3"×3'7")
Performance		
Platform Allowable Occupants(Indoor)		4 persons
Platform Allowable Occupants(Outdoor)		2 persons
Platform Capacity		450kg(992lbs)
Drive Speed-Stowed		6km/h(3.7mph)
Drive Speed-Raised		0.48km/h(0.3mph)
Elevation Time(Unloaded)		42s~52s
Descent Time(Unloaded)		33s~43s
Gradeability		35%
Turning Radius(Inside/Outside)		2.11m/4.6m(7'11"/15'1")
Tilt Rating(Front to Back)		3°
Tilt Rating (Side to Side, Outrigger Tele-In/Tele-Out)		2°/0.8°
Max Outrigger Leveling(Front to Back)		5.3°(front)/4.2°(back)
Max Outrigger Leveling(Side to Side)		11.7°
Tire Size/Type		26×12-16.5/Solid foam-filled
Power		
Power Source		-
Drive Mode		2WD×2WS
Fuel Tank Capacity-Diesel		72L/15.8gal
Hydraulic System Capacity		90L/19.8gal
Weight		
Weight(Outriggers/Without Outriggers)		4,510kg(9,943lbs)/ 4,050kg(8,8929lbs)
Standards Compliance		CE/CU-TR